

Big
Brightly
Lightly
3 Color

Specific small-current radio wave type

Wireless Calling Indicator

AN426II



Big

The display window became large. Conventional article 100Hx100W became 150Hx100Wmm/1 window.

Brightly

Visibility improved by adoption of LED. Maintenance also became easy.

Lightly

It became conventionally lighter than elegance by adoption of an aluminum frame. 12Kg→8kg

3Color

The contents of a display can express in an Orange / Green / Red.

AN426RII
(Receiver)



AN426RII-MRD

■Option
The installation of the melody phone is possible.



AN426TII
(Transmitter)

AN426TII is equipped mode of conventional article

AN426II is wireless calling system.
Communication distance is about 120m - 200m of indoor (It changes with environment.)

The operating situation of the production process can grasp at a glance with large-sized LED display (an orange/green/red)

AN426II can display various contents depending on your use. For example, "abnormal call" and "relief man call" and "operating" etc. etc. . . .

Number Indication type



BN426RII

HERUTU

Specific small-current radio wave type

1mW


Wireless Calling Indicator (Andon System)

Common Specifications

Item	Specification
Device Category	A specified low-power radio station in compliance with ARIB STD-T67
Working Frequency	426.0250 MHz to 426.1375 MHz (12.5 kHz steps / 10 waves / switchable with a rotary switch)
Emission Class	F1D
Modulation Sytem	Direct 2-value FSK
Modulating Speed	977 bps
Communication Method	Simplex communication × Sporadic communication
The number of setting codes	AN426R II →1000Set (CH1~10 × SetNo. 1~10 × UnitNo. 1~10) BN426R II →100Set (CH1~10 × SetNo. 1~10)

Transmitter

AN426T II

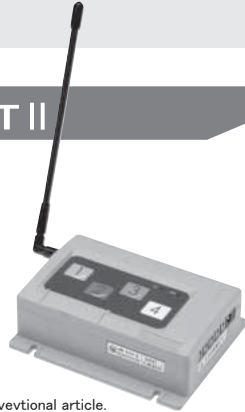

※AN426T II is equipped mode of the conventional article.

8 Window ANDON type

AN426R II



※With merody phone type is[AN426R II-MRD]

Number Indication type

BN426R II



※Double side type is [BNW426R II-MRD]

※With merody phone type is[BN426R II-MRD]

Item	Specification
Input terminal	Push-button input x 4 (1-4) Dry contact input x 4 (1-4)
Display element	Red LED (BA) x 1 (for power alarm) Green LED (TX) x 1 (lights during transmission)
Power supply	DC5V Attached AC adapter (DC5 V), or size AA battery x 3
Power consumption	DC5V 100mA(for ACadapter)
Dimensions	approx. 120 (W) x 95 (H) x 37.5 (D) mm (with projections excluded)
Weight	approx. 170 g (with batteries excluded)
Service environment	Temperature: 0 to +50° C Humidity: 85% or less (No condensation)
Number of using	Size AA battery using, 1second/1time about 250,000

Item	Specification
Display element	LED indicator x 8 (LED size: 100 x 150 mm rectangular) 3-color LED illumination (green/orange/red)
Output terminal	Open collector output x 4 Max rated load: DC35 V / 50 mA Relay output x 1 (PhotoMos relay) Max rated load: AC/DC30 V / 0.5 A
Input terminal	Power input x 1 (AC100-120 V) All reset input x 1 (dry contact) Output reset input x 1 (dry contact)
Power supply	AC100 V
Power consumption	Max 90 W
Dimensions	1000W x 300H x 80D (mm) (projections excluded)
Weight	approx. 8 kg
Service environment	Temperature: 0 to +40° C Humidity: 85% or less (No condensation)

Item	Specification
Display element	4-digit High-luminance 7-segment LED display (single side) 1 Character size 110H×60Dmm
Output terminal	Open collector output x 2 Max rated load: DC35V 50mA Relay output x 2 Max rated load: AC125V 0.5V /DC24V 1A
Input terminal	For key board unit KE-2(option)
Power supply	AC100 V
Power consumption	Max 25 W
Dimensions	600W x 290H x 80D (mm) (projections excluded)
Weight	approx. 8 kg
Service environment	Temperature: 0 to +50° C Humidity: 85% or less (No condensation)

Point of contact output receiver



WCP-426R



Open collector output x 16(max)



WARNING

- ※The communication performance varies depending on the ambient environment
- ※The indicated company name, product name, etc. are the trademarks of our company.

HERUTU

HERUTU ELECTRONICS CORPORATION

〒433-8103

62-1 Toyooka-cho, Kita-ku, Hamamatsu-shi,
Shizuoka-ken JAPAN

TEL +81-53-438-3555 FAX +81-53-438-3411

URL <http://www.herutu.co.jp>

E-mail webmaster@herutu.co.jp

The specification of a product may be changed without a preliminary announcement for improvement.
2007.05.05A